


112 Frame motor dimensions

4.0 kw 2800 RPM(2 Pole) 3 Phase

B3

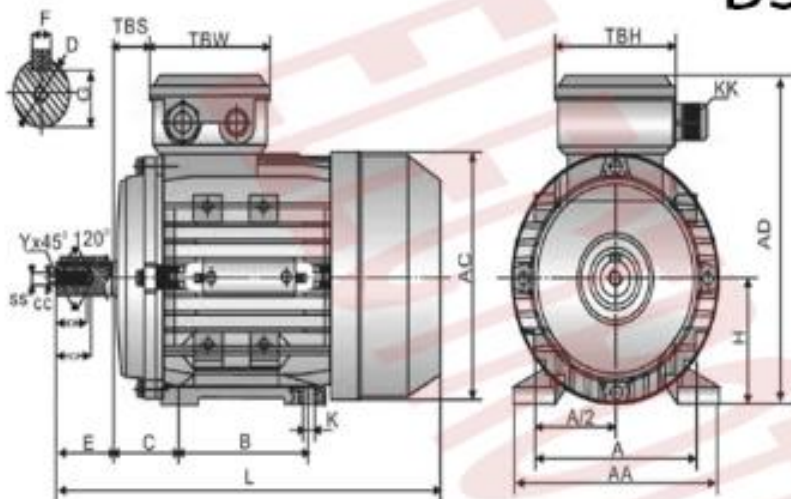


B3				
H	A	B	C	K
112	190	140	70	12 x 15

Shaft						
D	E	F	G	SS	XX	ZZ
28	60	8	24	M10	22	30

General							
AA	AD	HD	AC	L	TBS	TBW	TBH
220	279	167	229	395	32	32	112

B34

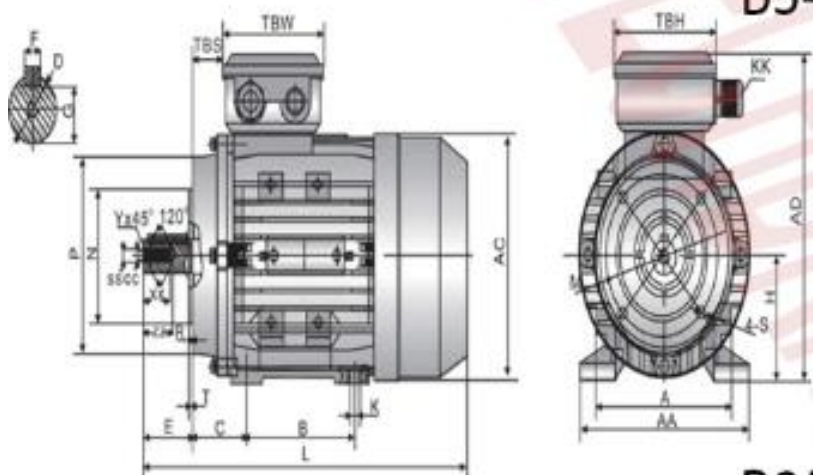


Feet and B14 Flange										
H	A	B	C	K	N	M	P	T	S	R
100	160	140	63	12 x 15	110	130	160	3.5	M8	0

Shaft						
D	E	F	G	SS	XX	ZZ
28	60	8	24	M10	22	30

General							
AA	AD	HD	AC	L	TBS	TBW	TBH
198	252	152	205	369	26	26	105

B35

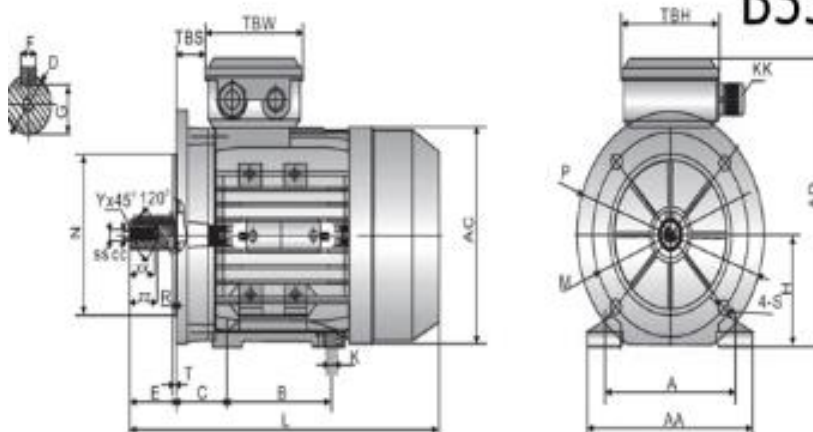

Feet and B5 Flange										
H	A	B	C	K	M	N	P	T	S	R
112	190	140	70	12 x 15	215	180	250	4.00	15	0

Shaft						
D	E	F	G	SS	XX	ZZ
28	60	8	24	M10	22	30

General							
AA	AD	HD	AC	L	TBS	TBW	TBH
220	279	167	229	395	32	32	112

ALL FLANGED MOTORS COME WITH DETATCHABLE FEET